

Series 1006

- Test probe for 40 mil centers
- Short travel
- Low contact force

Mechanical Data

Center	1.02 mm/40 mil
Full Travel	2.29 mm
Working Travel	1.27 mm
Pre-loaded Spring Force	0.17/ 0.15 N
Spring Force at Working Travel	0.37/ 0.45 N

Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 55 mOhm

Materials

Barrel	Bronze, gold plated
Spring	Bronze, Stainless Steel, gold plated
Plunger	CuBe, gold plated
Receptacle	Bronze, gold plated


Recommended Diameter of Drill

HP 2361.1 (Trolitax)	0.69...0.70 mm
HGW 2372	0.72...0.73 mm

Tip style - Diameter - Plating



B	D	G	G3
0.53C Au	0.53C Au	0.53C Au	0.28C Au

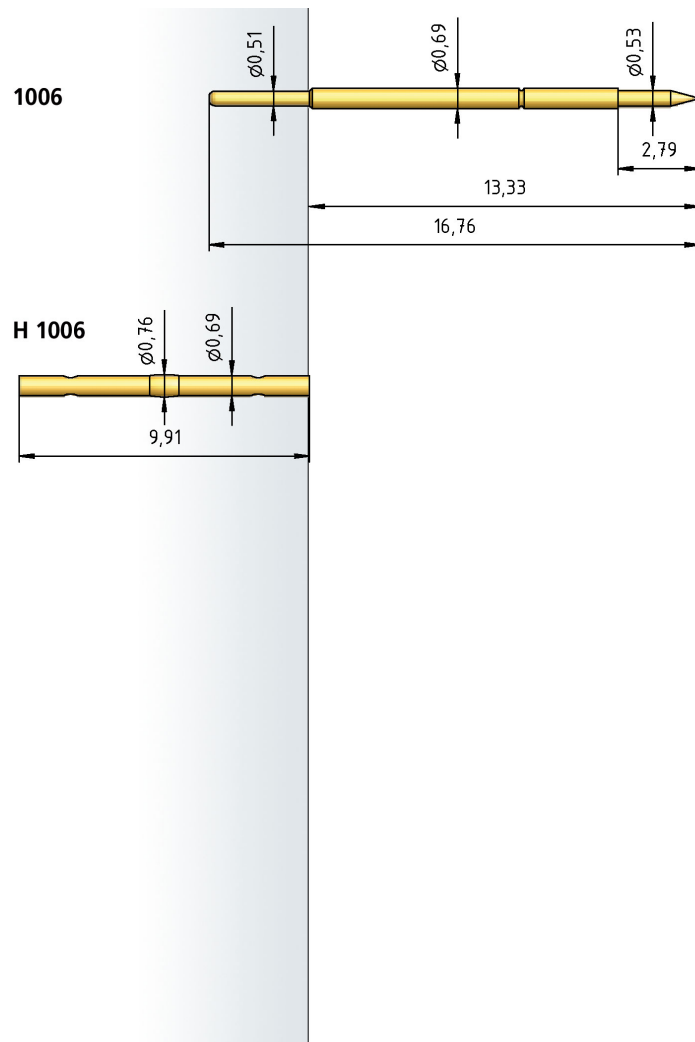

How to Order

1006 - B - 0.45 N - Au - 0.53 C
 1 2 3 4 5 6

1. Series 2. Tip Style 3. Spring Force
 4. Tip Plating 5. Tip Diameter 6. Tip Material (only for CuBe)