

Series 1007.50

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.27 mm/50 mil
Full Travel	2.00 mm
Working Travel	1.35 mm
Pre-loaded Spring Force	0.35 N
Spring Force at Working Travel	0.75 N

Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 75 mOhm


Materials

Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel, rhodium plated
Receptacle	Bronze, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	0.84 mm
HGW 2372	0.86 mm

Tip style - Diameter - Plating



G3

0.51 Rh

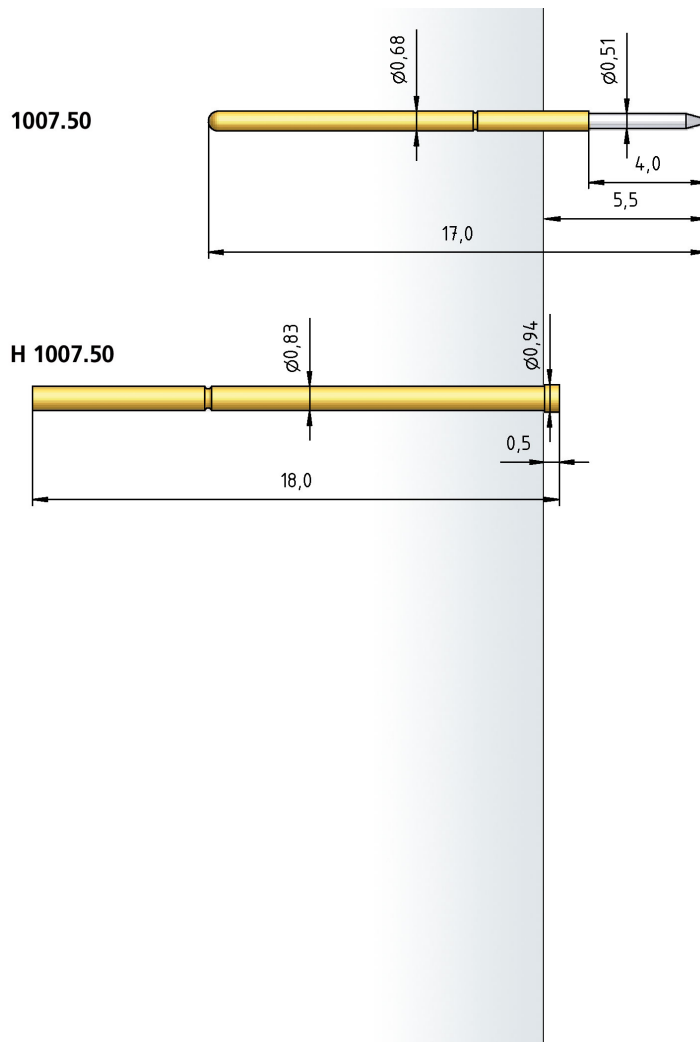

How to Order

1007 .50 - G3 - 0.75 N - Rh - 0.51

1 2 3 4 5 6

1. Series 2. Variant 3. Tip Style
4. Spring Force 5. Tip Plating 6. Tip Diameter