

Series 1011

- Universal field of application
- Compact design
- Short travel
- Contacting of assembled PCBs

Mechanical Data

Center	1.91 mm/75 mil
Full Travel	4.20 mm
Pre-loaded Spring Force	0.30/ 0.30 N
Spring Force at Full Travel	1.10/ 1.50 N

Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 50 mOhm

Materials

Barrel	Bronze, gold plated
Spring	Stainless Steel, coated
Plunger	CuBe, rhodium plated
Receptacle	Bronze, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	1.30 mm
with pressed-in Ring	1.40 mm
HGW 2372	1.31 mm
with pressed-in Ring	1.41 mm

Tip style - Diameter - Plating



A

0.72C Rh

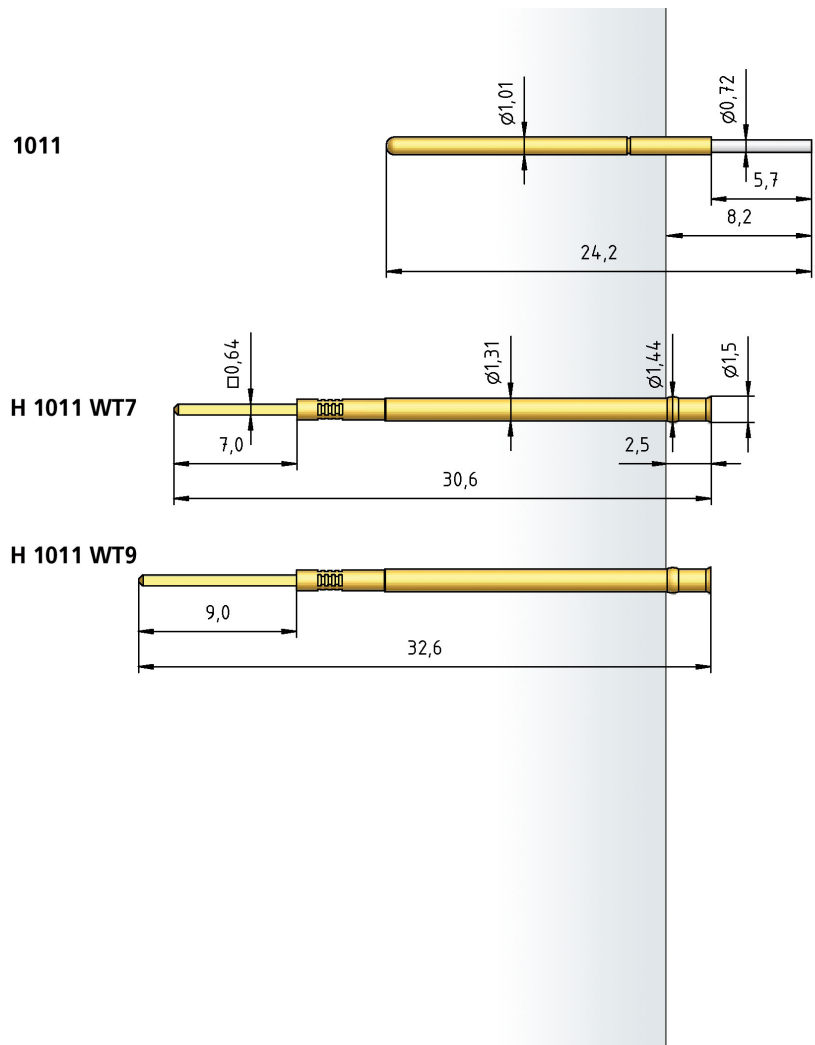

How to Order

1011 - A - 1.1 N - Rh - 0.72 C

1 2 3 4 5 6

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter 6. Tip Material (only for CuBe)