

Series 1013/Z

- International standard for 75 mil applications
- Contacting of assembled PCBs
- Spring travel 12.0 mm

Mechanical Data

Center	1.91 mm/75 mil
Full Travel	12.00 mm
Working Travel	9.60 mm
Pre-loaded Spring Force	0.40/ 0.35 N
Spring Force at Working Travel	1.20/ 1.60 N

Electrical Data

Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 30 mOhm

Materials

Barrel	Bronze, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Bronze, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	1.30 mm
with pressed-in Ring	1.36 mm
HGW 2372	1.32 mm
with pressed-in Ring	1.37 mm

Tip style - Diameter - Plating



C	H	Q	Q	V
1.15 Au	1.15 Au	0.64 Au	1.15 Au	0.64 Au

1013/Z

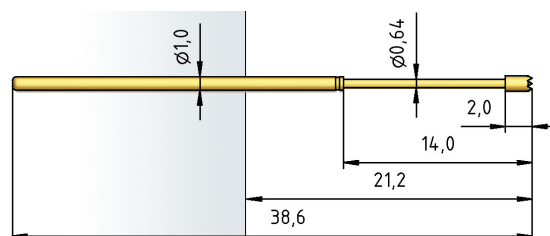

How to Order


1013/Z - C - 1.6 N - Au - 1.15

1 2 3 4 5

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter

Receptacles 1013/Z

H 1012 C

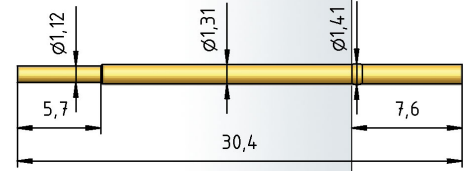

H 1012 L



H 1012 W




H 1012 WR



H 1012 W18



H 1012 C-K




H 1012 L-K



H 1012 W-K



H 1012/2 C




H 1012/2 L



H 1012/2 W



H 1012/10 C



H 1012/10 L



H 1012/10 W

