

Series 1061/G

- Test probe for cable harness testing
- Increased installation height
- Screwable - threaded design
- Screwing tools available

Mechanical Data

Center	4.00 mm/160 mil
Full Travel	7.00 mm
Working Travel	5.60 mm
Pre-loaded Spring Force	0.40/ 0.60 N
Spring Force at Working Travel	1.50/ 3.00 N

Electrical Data

Max. Current Rating	5.0 A
Typical Continuity Resistance	<= 35 mOhm

Materials

Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Brass, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	3.00 mm
HGW 2372	3.01 mm

Tip style - Diameter - Plating




B	BA
1.80 Ni	1.80 Rh

1061/G

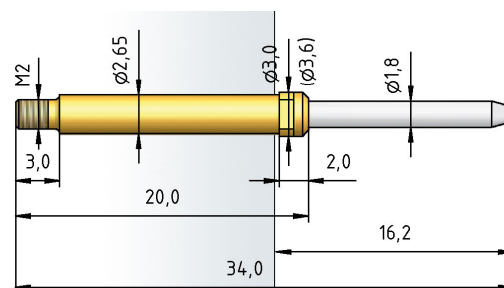

H 1060/G-L

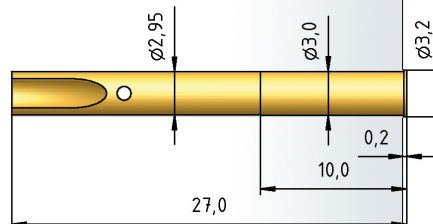

H 1060/GR-L



H 1060/GRV-L



This receptacle is sealed vacuum-tight when a wire is soldered on.
Important:
 If too much solder is used there is a risk that it will get into the tread.

How to Order

1061/ G - B - 1.5 N - Ni - 1.8

1 2 3 4 5 6

1. Series 2. Threaded Design 3. Tip Style
 4. Spring Force 5. Tip Plating 6. Tip Diameter