

# Series 2053

- Anti-turn feature ensures forced guidance between plunger and barrel
- Knurled section on the barrel guarantees secure fit of the test probe

### Mechanical Data

Center	2.54 mm/100 mil
Full Travel	5.00 mm
Working Travel	4.00 mm
Pre-loaded Spring Force	0.45/ 0.60/ 1.00 N
Spring Force at Working Travel	1.50/ 3.00/ 5.00 N

### Electrical Data

Max. Current Rating	5.0...8.0 A
Typical Continuity Resistance	<= 30 mOhm


### Materials

Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Brass, gold plated


### Recommended Diameter of Drill

HP 2361.1 (Trolitax)	1.98...2.00 mm
HGW 2372	1.98...2.00 mm


### Tip style - Diameter - Plating




Y1	Y21	Y1F	Y1F	Y1F
2.00 x 0.58 Au	2.00 x 0.50 Au	1.50 x 0.50 x 2.00 Au	1.50 x 0.58 x 2.00 Au	1.50 x 0.58 x 2.80 Au



Y1F1	Y2F	Y3F	Y6	Y11
1.50 x 0.58 x 2.80 x 2.00 Au	1.50 x 0.50 x 2.00 Rh	1.50 x 0.50 x 2.50 Au	3.00 x 1.55 Au	2.00 x 0.58 Au



Y12	Y21R
1.80 x 0.80 Au	2.00 x 0.50 Au

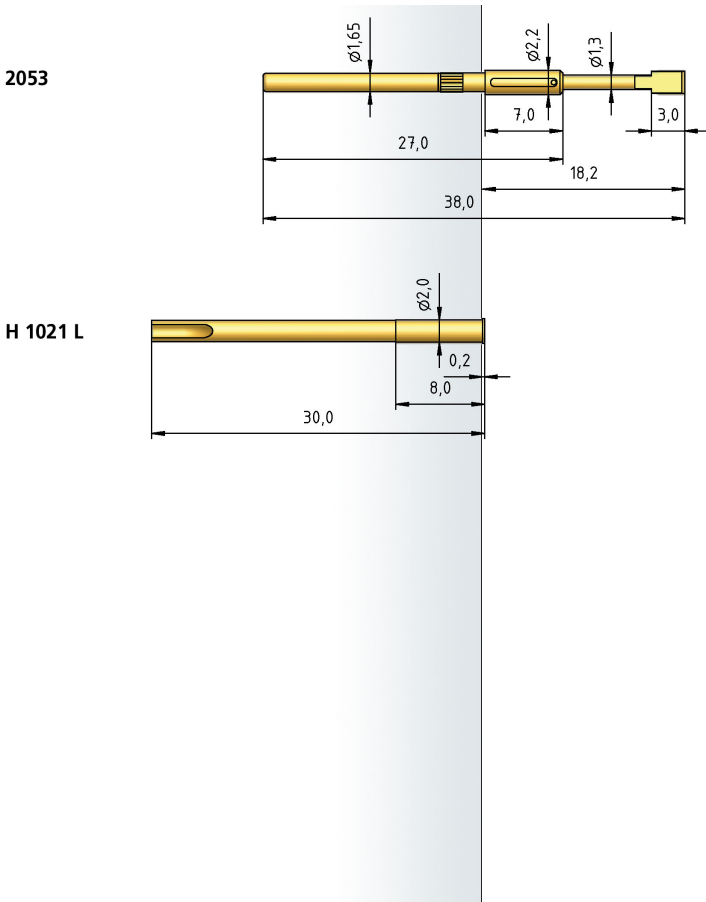

### How to Order

<b>2053</b>	-	<b>Y1</b>	-	<b>1.5 N</b>	-	<b>Au</b>	-	<b>2.0x</b>	<b>0.58</b>
1	2	3	4	5	6				

1. Series 2. Tip Style 3. Spring Force  
4. Tip Plating 5. Tip Diameter 6. Tip Thickness