

Series 3020/2

- Switching test probe for the cable harness test
- Plug-in and threaded type
- Monitoring of components or periphery
- Switching travel 2.6 mm (4.0 mm on request)
- Soldering temperature max 300°C

Mechanical Data	
Center	2.54 mm/100 mil
Full Travel	5.30 mm
Working Travel	4.00 mm
Switching Travel	2.60 mm
Pre-loaded Spring Force	0.15/ 0.40/ 0.50/ 1.70 N
Spring Force at Working Travel	0.80/ 1.50/ 3.00/ 6.50 N
Spring Force at Switching Travel	0.25/ 0.80/ 1.80/ 4.50 N

Electrical Data	
Receptacle-Plunger	
Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 20 mOhm
Pin-Plunger	
Max. Current Rating	1.0 A
Typical Continuity Resistance	<= 50 mOhm
Typical Insulating Voltage	1000 V


Materials	
Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Brass, gold plated

Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	2.00 mm
HGW 2372	2.01 mm


Tip style - Diameter - Plating



A	C	C3	F	F
1.50 Au	1.30 Au 1.50 Au 3.00 Au	1.50 Au	0.80 Au	1.00 Au 1.30 Au 1.50 Au



F1
1.50 HTK

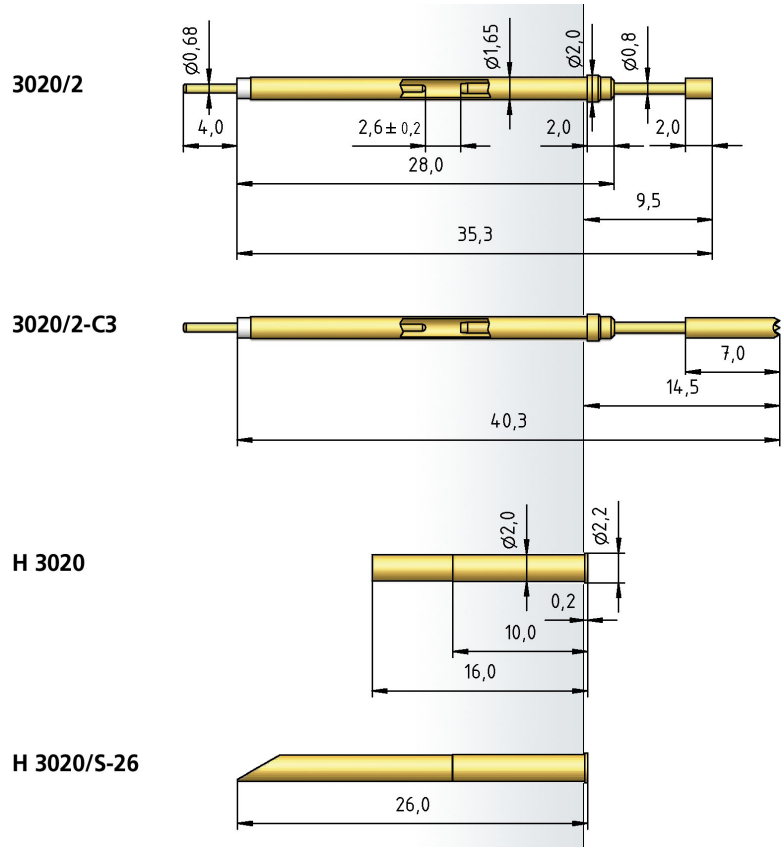

How to Order					
3020/	2	-	F	-	1.5 N
	-	Au	-	1.5	
	1	2	3	4	5 6
1. Series 2. Collar Height 3. Tip Style					
4. Spring Force 5. Tip Plating 6. Tip Diameter					