

Series 4034

- Switching test probe "Opener" (NC) type
- Contacting of individual test points
- Contacting without adapter possible
- For use in function test

Mechanical Data

Center	4.00 mm/160 mil
Full Travel	10.00 mm
Working Travel	5.00 mm
Switching Travel	6.00 mm
Spring Force at Working Travel	1.60 N
Spring Force at Switching Travel	1.50 N
Operating Pressure	6 bar
Operating Medium	Druckluft (gefiltert)

Electrical Data

Receptacle-Probe Tip	
Max. Current Rating	3.0 A
Typical Continuity Resistance	<= 30 mOhm
Tube Connection-Probe Tip	
Max. Current Rating	1.0 A
Typical Continuity Resistance	<= 50 mOhm




Materials

Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Steel
Receptacle	Brass, gold plated

Recommended Diameter of Drill


HP 2361.1 (Trolitax)	3.40 mm
HGW 2372	3.41 mm

Tip style - Diameter - Plating




A	BST1	G
3.00 Rh	2.00 Rh	1.30 Rh


4034

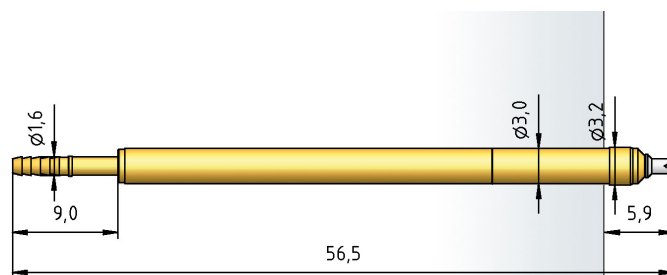

H 4004

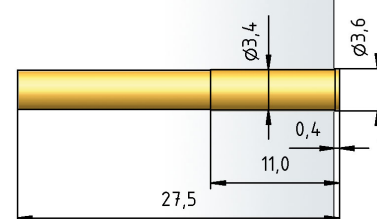

L 4000



How to Order

4034 - G - 1.6 N - Rh - 1.3 - L

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter 6. For Connection of L 4000