

Series 5099

- Short, compact size
- Board-to-board contacting
- For use in charging units

Mechanical Data	
Center	3.00 mm/118 mil
Full Travel	1.20 mm
Working Travel	1.00 mm
Pre-loaded Spring Force	0.30/ 0.50/ 0.30 N
Spring Force at Working Travel	0.60/ 1.00/ 2.00 N

Electrical Data	
Max. Current Rating	5.0...8.0 A
Typical Continuity Resistance	<= 10 mOhm


Materials	
Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	CuBe, gold plated
Receptacle	Brass, gold plated

Recommended Diameter of Drill	
with Receptacle	
HP 2361.1 (Trolitax)	2.29 mm
HGW 2372	2.30 mm
without Receptacle	
HP 2361.1 (Trolitax)	1.99 mm
HGW 2372	2.00 mm

Tip style - Diameter - Plating



D	D	G	V
1.00C Au	1.30C Au	1.30C Au	1.30C Au

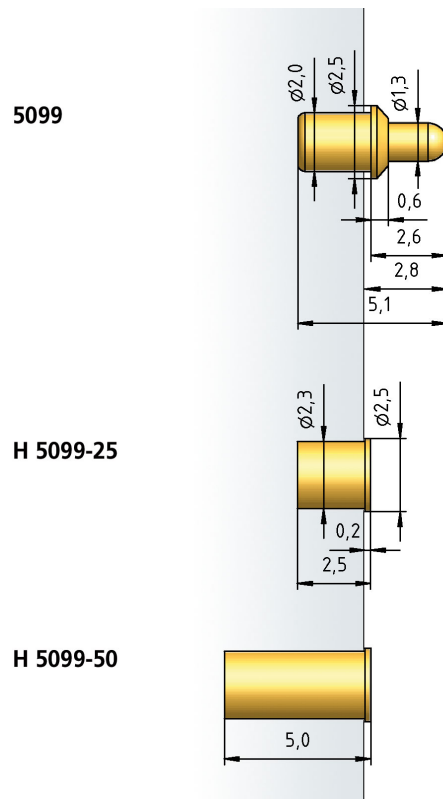

How to Order

5099	-	D	-	2.0 N	-	Au	-	1.3 C
1	2	3	4	5	6			

1. Series 2. Tip Style 3. Spring Force
4. Tip Plating 5. Tip Diameter 6. Tip Material (only for CuBe)