

Series 5265

- Push-back test probe for the cable harness test
- Especially suitable for spade-shaped tip style
- Non-rotating variant
- Receptacle with switch function

Mechanical Data	
Center	3.00 mm/118 mil
Full Travel	5.50 mm
Working Travel	5.00 mm
Switching Travel	2.60 mm
Pre-loaded Spring Force	1.00/ 2.00/ 3.00/ 3.80 N
Spring Force at Switching Travel	3.10/ 6.20/ 9.20/ 12.20 N
Spring Force at Working Travel (without Switching Element)	5.00/ 10.00/ 15.00/ 20.00 N
Spring Force at Working Travel (with Switching Element)	+1.00 N


Electrical Data	
Barrel-Probe Tip	
Max. Current Rating	8.0 A
Typical Continuity Resistance	<= 30 mOhm
Connector Probe Tip	
Max. Current Rating	1.0 A
Typical Continuity Resistance	<= 50 mOhm
Typical Insulating Voltage	1000 V

Materials	
Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	CuBe
Receptacle	Brass, gold plated


Recommended Diameter of Drill	
HP 2361.1 (Trolitax)	2.49...2.51 mm

(Tolerances dependent on carrier material, test drilling is recommended)


Tip style - Diameter - Plating



C	F	Y	Y	Y
2.00C Au 2.70C Au 3.00C Au	1.50C Au 1.80C Au 2.30C Au 3.00C Au	1.90x0.50C Au	1.90x0.80C Au	2.20 x 1.20C Au



Y	Y	Y	Y	YL
2.50x0.50C Au	2.50x0.80C Au	2.50x1.50C Au	2.70x0.80C Au	4.00x0.60C Au

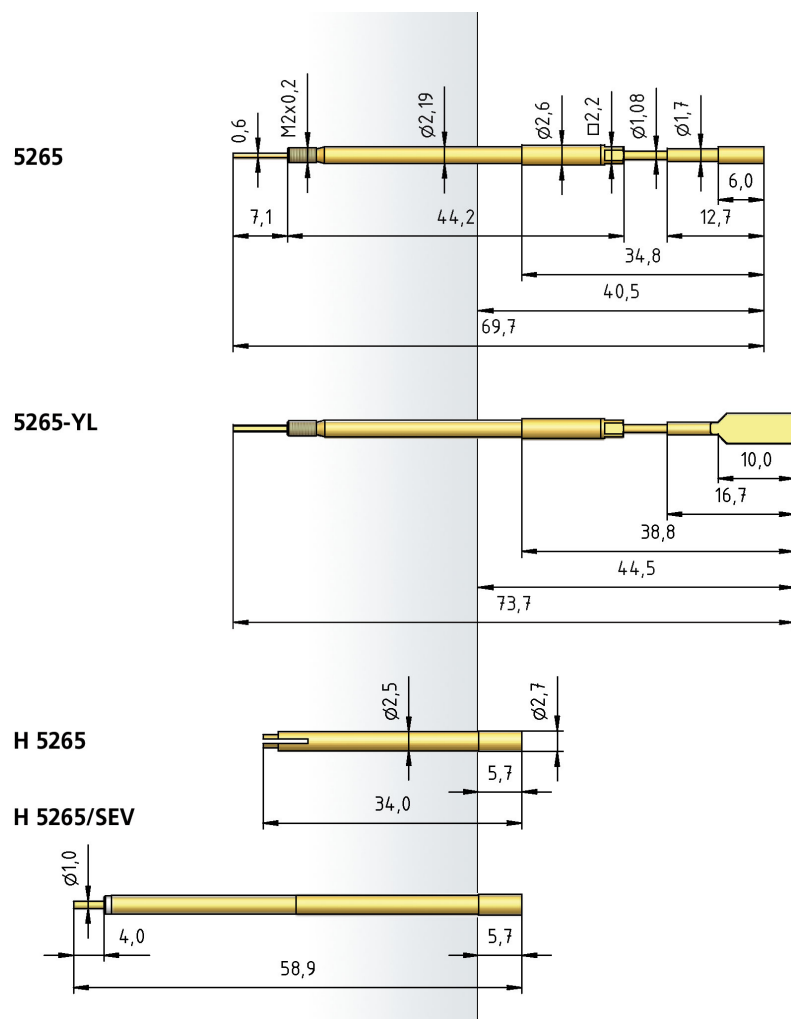

How to Order						
5265	-	Y	-	15.0 N	-	Au - 1.9x 0.8 C
1	2	3	4	5	6	7

1. Series 2. Tip Style 3. Spring Force
 4. Tip Plating 5. Tip Diameter 6. Tip Thickness
 7. Tip Material (only for CuBe)