

Series 5322 - PKB

- Short, compact size
- Board-to-board contacting
- For use in charging units
- 1- to 20-poles available

Mechanical Data



Center	2.54 mm/100 mil
Full Travel	1.40 mm
Working Travel	0.70 mm
Pre-loaded Spring Force	0.25 N
Spring Force at Working Travel	0.85 N

Electrical Data

Max. Current Rating	3.5 A
Typical Continuity Resistance	<= 20 mOhm
Typical Isolation Resistance	10 Ohm*m

Materials

Barrel	Brass, gold plated
Spring	Spring Steel, gold plated
Plunger	Brass, gold plated
Pad Contact	Brass, gold plated
Test Probe Block	HT-Plastic UL 94V-0

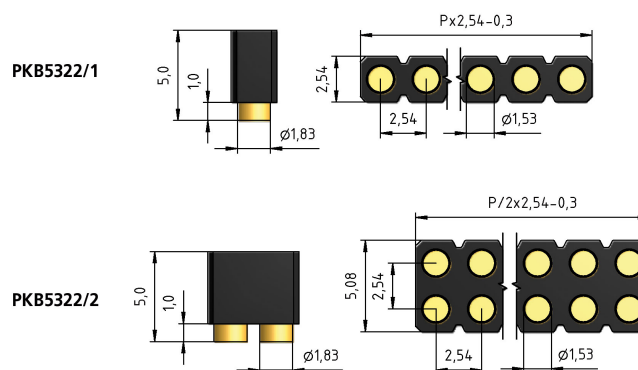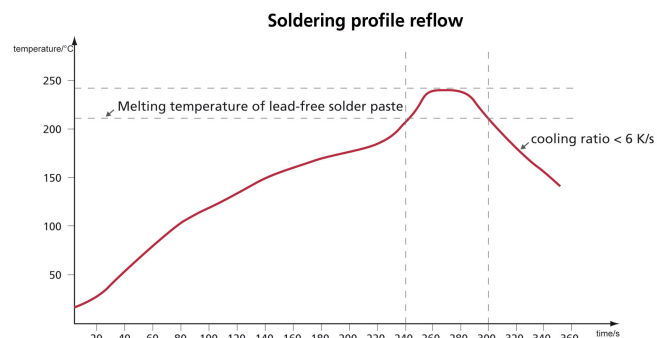

How to Order

PKB5322 / 1 - 2 - 50 - R24

1 2 3 4 5

1. Series 2. Number of Rows 3. Number of Poles
4. Contact Length 5. Tape on Reel